
RGA

PSD2220ZBB—Built-In Dishwasher


Dishwasher Dimensions (in inches)



Electrical Rating

Voltage AC	120
Hertz	
Total connected load amperage	8.6
Calrod® heater watts	500
For use on adequately wired 120-volt, 15-	amp
circuit having 2-wire service with a separa	ate
ground wire. This appliance must be ground	nded
for safe operation.	


Installation Information (in inches)

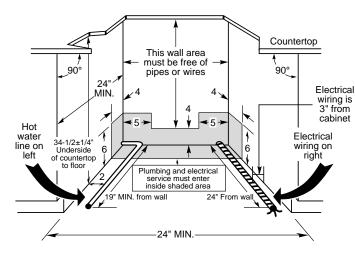

Note: Dishwasher must not be installed more than 10' from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes. Dishwasher includes drain hose and leveling legs.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Wood Insert Cut-Out Dimensions (in inches)



				Panei	
Models/Kits	Α	В	С	Thickness	
GPF325 Kit	18-7/8"	23-9/16"	3-11/16"	1/4″	
			4-1/4" to		
GPF375 Kit	18-15/16"	23-5/8"*	3-3/4"**	3/4"	
*D II					

Donal

For answers to your Monogram,®GE Profile Performance Series,™ GE Profile,™ GE, Hotpoint and RCA appliance questions, call GE Answer Center® service, 800.626.2000.




^{*}Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel

^{**}Adjustment required to match adjcent cabinets fronts due to leveling leg adjustment, 4" nominal.

RСЛ

PSD2220ZBB—Built-In Dishwasher

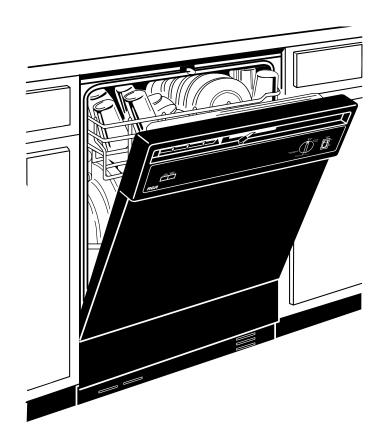

Features and Benefits

- 2 Wash Levels
- 5 Cycle Selections: Pots & Pans, Normal Wash, Water Saver (Dial), Plate Warmer (Dial), Rinse Only/Hold (Dial)
- Heated Dry On/Off Option
- Standard Upper Rack
- Deluxe Flat Lower Rack
- Deluxe Silverware Basket
- Standard Sound Insulation Package
- Trimless Appearance
- Model PSD2220ZBB-Black on Black